


ANSI (Inch)

Code	DN(In)	D	K	B	C	Φ	Holes	H
AN-GI-BR-07	7"	200	241.0	16	195	23	8	Download
AN-GI-BR-08	8"	343	298.0	20	238	22	8	Download
AN-GI-BR-10	10"	406	362.0	20	294	26	12	Download
AN-GI-BR-12	12"	483	432.0	25	338	26	12	Download
AN-GI-BR-14	14"	535	476.0	28	376	29	12	Download
AN-GI-BR-16	16"	600	540.0	32	430	30	16	Download
AN-GI-BR-18	18"	635	578.0	36	480	32	18	Download
AN-GI-BR-20	20"	700	635.0	40	533	33	20	Download
AN-GI-BR-22	22"	750	692.0	46	618	36	20	Download
AN-GI-BR-24	24"	813	749.0	50	645	36	20	Download

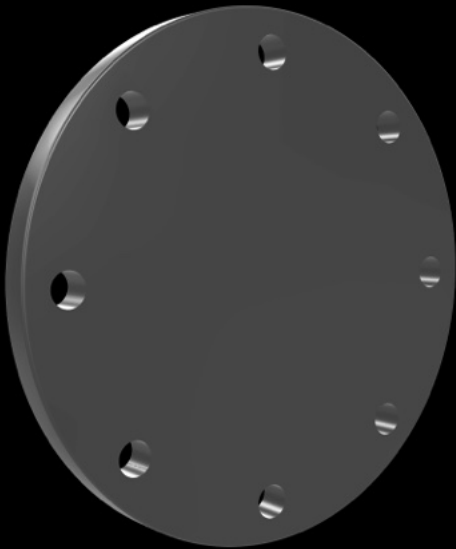

BLIND FLANGE (GI)

The GI Blind Backing Ring Drilled to PN16 and ANSI by **PRIME** is engineered to the latest and highest standards, offering a durable and reliable solution for sealing pipeline ends in water supply, irrigation, and firefighting networks. Manufactured from galvanized iron (GI), it provides superior corrosion resistance and long-lasting strength. With precise drilling to both PN16 and ANSI standards, this blind backing ring ensures a secure, leak-proof closure, making it ideal for demanding pipeline applications across various industries.



Drilled to PN16

Code	Dn	D	K	B	Φ	Holes
PN16-GI-BF-050	50	150	110	18	18	4
PN16-GI-BF-063	63	165	125	18	18	4
PN16-GI-BF-075	75	185	145	18	18	4

Drilled to PN16

Code	Dn	D	K	B	Φ	Holes
PN16-GI-BF-090	90	200	160	18	18	8
PN16-GI-BF-110	110	220	180	18	18	8
PN16-GI-BF-125	125	220	180	18	18	8
PN16-GI-BF-140	140	250	210	24	18	8
PN16-GI-BF-160	160	285	240	24	22	8
PN16-GI-BF-180	180	285	240	24	22	8
PN16-GI-BF-200	200	340	295	24	22	8
PN16-GI-BF-225	225	340	295	24	22	8
PN16-GI-BF-250	250	406	350	25	22	12
PN16-GI-BF-280	280	406	350	25	22	12
PN16-GI-BF-315	315	460	400	25	22	12
PN16-GI-BF-355	355	520	460	25	22	16
PN16-GI-BF-400	400	580	515	25	26	16
PN16-GI-BF-450	450	675	620	25	26	20
PN16-GI-BF-500	500	675	620	25	26	20
PN16-GI-BF-560	560	796	725	25	30	20
PN16-GI-BF-630	630	800	725	25	30	20



ANSI (In)						
Code	Dn(In)	D	K	B	Φ	Holes
AN-GI-BF-04	4	220	190.5	12	20	8
AN-GI-BF-05	5	220	216.0	16	23	8
AN-GI-BF-06	6	285	241.0	16	23	8
AN-GI-BF-07	7	340	241.0	16	23	8
AN-GI-BF-08	8	340	298.5	20	22	8
AN-GI-BF-10	10	406	362.0	20	26	12
AN-GI-BF-12	12	460	432.0	25	26	12
AN-GI-BF-14	14	520	476.0	28	29	12
AN-GI-BF-16	16	580	540.0	32	30	16
AN-GI-BF-18	18	675	578.0	36	32	18
AN-GI-BF-20	20	675	635.0	40	33	20
AN-GI-BF-22	22	796	692.0	46	36	20
AN-GI-BF-24	24	800	749.0	50	36	20

