



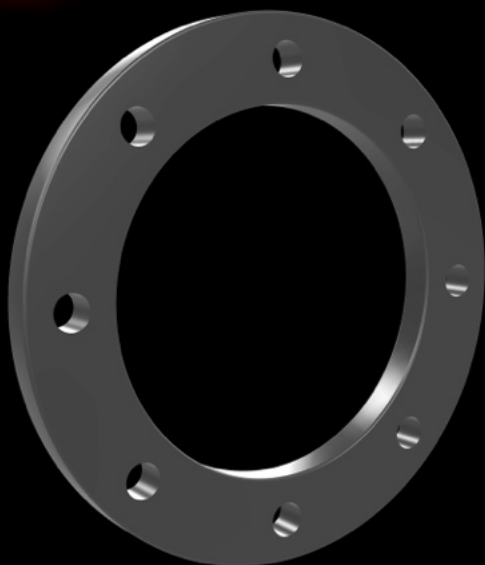

Coated Steel Flange (PN16,10)

The Coated Steel Flange Drilled to PN16 and PN10 by **PRIME** is manufactured to the latest and highest standards, providing a robust and reliable connection for water supply, irrigation, and firefighting networks. Made from high-quality steel with a protective coating, it is designed to withstand corrosion and deliver long-lasting performance. With precision drilling for both PN16 and PN10 standards, it ensures a secure, leak-proof connection for various pipeline applications in demanding environments.

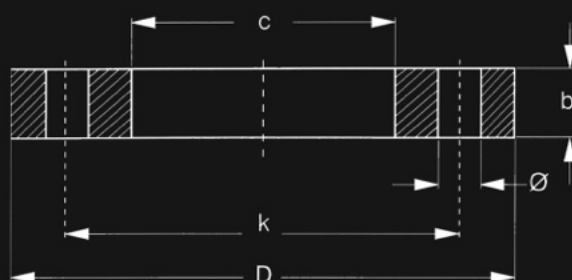

PN10

Code	Dn	D	K	B	C	Φ	Holes
PN10-GI-BR-025	25	105	75	14	34	14	4
PN10-GI-BR-032	32	115	85	14	42	14	4
PN10-GI-BR-040	40	140	100	16	51	18	4
PN10-GI-BR-050	50	150	110	18	62	18	4
PN10-GI-BR-063	63	165	125	18	78	18	4
PN10-GI-BR-075	75	185	145	18	92	18	4
PN10-GI-BR-090	90	200	160	18	108	18	8
PN10-GI-BR-110	110	220	180	18	128	18	8
PN10-GI-BR-125	125	220	180	18	135	18	8
PN10-GI-BR-140	140	250	210	24	158	18	8
PN10-GI-BR-160	160	285	240	24	178	22	8
PN10-GI-BR-180	180	285	240	24	188	22	8
PN10-GI-BR-200	200	340	295	24	235	22	8
PN10-GI-BR-225	225	340	295	24	238	22	8

PN10							
Code	Dn	D	K	B	C	Φ	Holes
PN10-GI-BR-250	250	406	350	31	288	22	12
PN10-GI-BR-280	280	406	350	34	294	22	12
PN10-GI-BR-315	315	460	400	34	338	22	12
PN10-GI-BR-355	355	520	460	39	376	22	16
PN10-GI-BR-400	400	580	515	43	430	26	16
PN10-GI-BR-450	450	675	620	54	517	26	20
PN10-GI-BR-500	500	675	620	54	533	26	20
PN10-GI-BR-560	560	796	725	64	618	30	20
PN10-GI-BR-630	630	800	725	58	645	30	20

PN16							
Code	Dn	D	K	B	C	Φ	Holes
PN16-GI-BR-025	25	105	75	14	34	14	4
PN16-GI-BR-032	32	115	85	14	42	14	4
PN16-GI-BR-040	40	140	100	16	51	18	4
PN16-GI-BR-050	50	150	110	18	62	18	4
PN16-GI-BR-063	63	165	125	18	78	18	4
PN16-GI-BR-075	75	185	145	18	92	18	4
PN16-GI-BR-090	90	200	160	18	108	18	8
PN16-GI-BR-110	110	220	180	18	128	18	8
PN16-GI-BR-125	125	220	180	18	135	18	8
PN16-GI-BR-140	140	250	210	24	158	18	8
PN16-GI-BR-160	160	285	240	24	178	22	8
PN16-GI-BR-180	180	285	240	24	188	22	8
PN16-GI-BR-200	200	340	295	24	235	22	12
PN16-GI-BR-225	225	340	295	24	238	22	12

PN16

Code	Dn	D	K	B	C	Φ	Holes
PN16-GI-BR-250	250	409	355	30	288	26	12
PN16-GI-BR-280	280	409	355	30	294	26	12
PN16-GI-BR-315	315	463	410	34	338	26	12
PN16-GI-BR-355	355	515	470	42	376	26	16
PN16-GI-BR-400	400	574	525	46	430	30	16
PN16-GI-BR-450	450	715	650	46	517	33	20
PN16-GI-BR-500	500	715	650	46	533	33	20
PN16-GI-BR-560	560	840	770	55	618	36	20
PN16-GI-BR-630	630	840	770	55	645	36	20

