




STUB FLANGE LONG

The HDPE Stub Flange by **PRIME** is manufactured to the latest and highest standards using high-quality HDPE rod pipes, providing a reliable and precise connection. It is the ideal solution for joining HDPE pipes with metal pipes such as cast iron or steel, ensuring a secure, leak-proof transition. Designed for water supply, irrigation, and firefighting networks, this stub flange delivers exceptional durability and long-term performance for various pipeline applications.

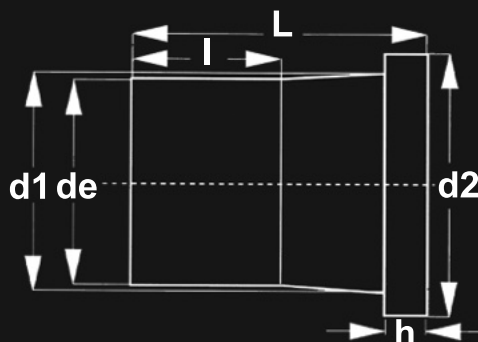

SDR 17


Code	De	H	I	D1	D2	L
HP-10PN-STL-FR-063	63	14	66	75	102	120
HP-10PN-STL-FR-075	75	18	78	89	122	130
HP-10PN-STL-FR-090	90	18	84	105	138	145
HP-10PN-STL-FR-110	110	18	100	125	158	155
HP-10PN-STL-FR-125	125	18	108	132	158	170
HP-10PN-STL-FR-140	140	18	109	155	188	195
HP-10PN-STL-FR-160	160	18	110	175	212	195
HP-10PN-STL-FR-180	180	20	115	180	212	200
HP-10PN-STL-FR-200	200	24	127	232	268	205
HP-10PN-STL-FR-225	225	24	137	235	268	205
HP-10PN-STL-FR-250	250	25	146	285	320	205
HP-10PN-STL-FR-280	280	25	156	291	320	220
HP-10PN-STL-FR-315	315	25	160	335	370	225
HP-10PN-STL-FR-355	355	30	175	373	430	260

SDR17						
Code	De	H	I	D1	D2	L
HP-10PN-STL-FR-400	400	33	95	427	482	285
HP-10PN-STL-FR-450	450	46	280	519	585	400
HP-10PN-STL-FR-500	500	46	280	530	585	400
HP-10PN-STL-FR-560	560	50	280	615	685	400
HP-10PN-STL-FR-630	630	50	280	624	685	400
HP-10PN-STL-FR-710	710	50	280	737	800	400
HP-10PN-STL-FR-800	800	52	280	840	905	400
HP-10PN-STL-FR-900	900	55	280	944	1005	400
HP-10PN-STL-FR-1000	1000	60	260	1047	1110	400

SDR11						
Code	De	H	I	D1	D2	L
HP-16PN-STL-FR-063	63	14	66	75	102	120
HP-16PN-STL-FR-075	75	18	78	89	122	130
HP-16PN-STL-FR-090	90	18	84	105	138	145
HP-16PN-STL-FR-110	110	18	100	125	158	155
HP-16PN-STL-FR-125	125	18	108	132	158	170
HP-16PN-STL-FR-140	140	18	109	155	188	195
HP-16PN-STL-FR-160	160	18	110	175	212	195
HP-16PN-STL-FR-180	180	20	115	180	212	200
HP-16PN-STL-FR-200	200	24	127	232	268	205
HP-16PN-STL-FR-225	225	24	137	235	268	205
HP-16PN-STL-FR-250	250	25	146	285	320	205
HP-16PN-STL-FR-280	280	25	156	291	320	220
HP-16PN-STL-FR-315	315	25	160	335	370	225
HP-16PN-STL-FR-355	355	30	175	373	430	260


SDR11

Code	De	H	I	D1	D2	L
HP-16PN-STL-FR-400	400	33	95	427	482	285
HP-16PN-STL-FR-450	450	46	280	519	585	400
HP-16PN-STL-FR-500	500	46	280	530	585	400
HP-16PN-STL-FR-560	560	50	280	615	685	400
HP-16PN-STL-FR-630	630	50	280	624	685	400
HP-16PN-STL-FR-710	710	50	280	737	800	400
HP-16PN-STL-FR-800	800	52	280	840	905	400
HP-16PN-STL-FR-900	900	55	280	944	1005	400
HP-16PN-STL-FR-1000	1000	60	260	1047	1110	400

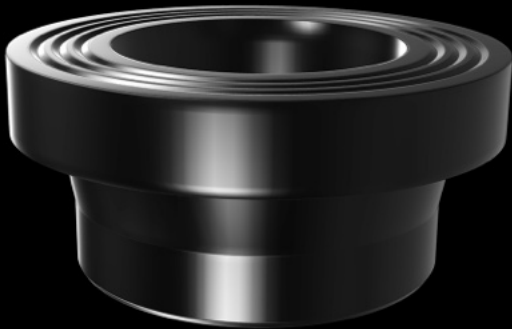

Stub Flange Short

The HDPE Stub Flange (Short) by **PRIME** is manufactured to the latest and highest standards using high-quality HDPE rod pipes, providing a reliable and precise connection. It is the ideal solution for joining HDPE pipes with metal pipes such as cast iron or steel, ensuring a secure, leak-proof transition. Designed for water supply, irrigation, and firefighting networks, this stub flange delivers exceptional durability and long-term performance for various pipeline applications.

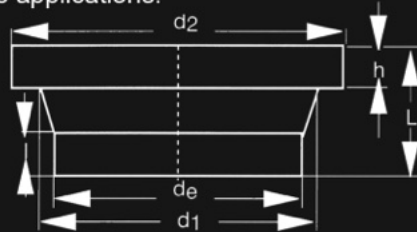

SDR17

Code	De	H	I	D1	D2	L
HP-10PN-STs-FR-050	50	12	21	61	88	50
HP-10PN-STs-FR-063	63	14	16	75	102	50
HP-10PN-STs-FR-075	75	16	14	89	122	50
HP-10PN-STs-FR-090	90	17	33	105	138	80
HP-10PN-STs-FR-110	110	18	27	125	158	80
HP-10PN-STs-FR-125	125	18	42	132	158	80
HP-10PN-STs-FR-140	140	18	34	155	188	80